TIR®700-09 Series
Carbon Fiber Thermal Pad



TIR®700-09 Series is a high-performance carbon fiber thermal conductive pad. It combines high thermal conductivity carbon fiber with polymer silicone material, and adopts advanced technology to vertically align the carbon fibers, thereby achieving excellent thermal conductivity, effectively reducing interfacial thermal resistance and improving heat dissipation efficiency. Featuring ultra-thinness, light weight and mechanical flexibility, it is suitable for applications requiring high heat dissipation performance as well as good mechanical strength of the material.

Features

- 》 High thermal conductivity
- 》 High temperature resistance
- 》 Good flexibility
- 》 No surface stickiness
- 》 Good mechanical strength and durability


Applications

- 》 LED high-power lighting
- 》 Electronic device cooling
- 》 Communication base stations and servers
- 》 Batteries and electronic control systems of electric vehicles


Typical Properties of TIR®700-09 Series

Property	Value	Test Method
Color	Gray	Visual
Composition	Carbon fiber filled silicone	ZKTM J024
Thickness Range (inch/mm)	0.020~0.200 0.50~5.00	ASTM D374
Hardness (Shore OO)	65±10	ASTM D2240
Density (g/cm^3)	2.1	ASTM D792
Recommended Operating Temperature(°C)	-40~200	ZKTM J025
Thermal Conductivity (W/m·K)	9.0	ASTM D5470
Specific Heat Capacity (J/g·°C) @25°C	0.93	ASTM E1269
Flame Rating	V-0	Equivalent to UL94

Thermal Impedance

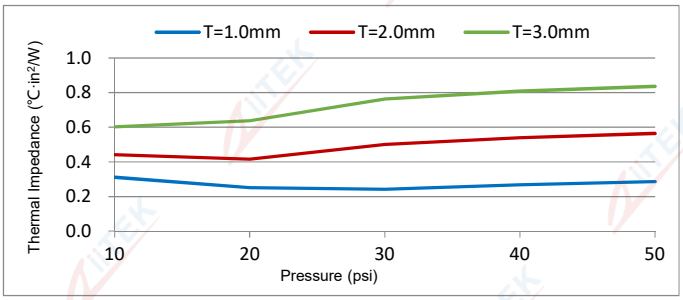

Compression Ratio

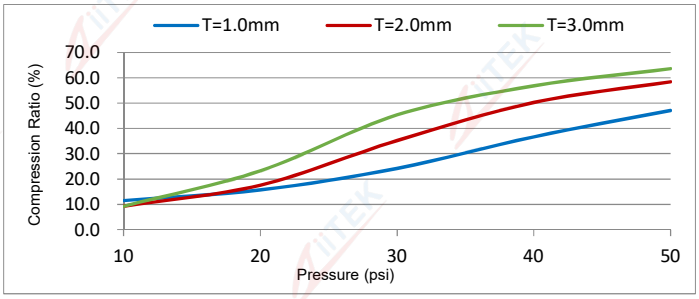

Product Identifier

TIR7 00 - 09

- TIR7: Product Series
- 00: Thickness: 20mils ~ 200mils
- 09: Thermal Conductivity: 9.0 W/m·K

Product Specifications

Standard Thickness: 0.020"(0.50 mm)~ 0.200"(5.00 mm) with increments of 0.010" (0.25 mm).

Standard Size: 5" × 6" (127 mm × 152.4 mm)

The TIR® 700-09 series products can be molded into different shapes for supply. If you need different thicknesses and larger sizes or more information on thermal conductive materials, please contact our company.

Note: This product is conductive and not an insulating material.

Global solutions: Local support

China: +86-769-38801208
Taiwan: +886-2-2277-1007
Canada: +001-604-2998559
Vietnam: +84-396852859

service@ziitek.com

www.ziitek.com

Ziitek Technology Ltd and it's distributors provide information deemed accurate and reliable. However, product specifications may be adjusted due to technical modifications or optimizations without prior notice. The responsibility for product use and application lies with the end user. Ziitek makes no guarantees regarding the product's suitability, merchantability, or fitness for a particular purpose and assumes no liability for incidental or consequential damages. Ziitek and it's logo are the property of the company or it's affiliates.